



STELLA DORADUS

# StellaOffice REPEATER

The StellaOffice is a commercial grade, cellular repeater which provides mobile coverage in large buildings.




**The StellaOffice is a commercial grade, cellular repeater which provides mobile coverage in large buildings. It has 4 ports for connecting 4 indoor antennas, which increase the coverage to between 5 and 15 internal rooms, depending on the size and shape of the room.**

This powerful repeater has a simple 10 LED indicator to assist during the installation. It is R.E.D compliant, passes all E.T.S.I. compliance tests for the EU and is safe to use on the operator's network

Several frequency combinations are available, see below.

## Features

- Coverage: 5-15 rooms
- Compatible with all mobile operators
- Voice and data
- No existing broadband required
- Simple and intuitive 10 LED indicator
- Everything included for complete installation
- Conforms to E.T.S.I specifications

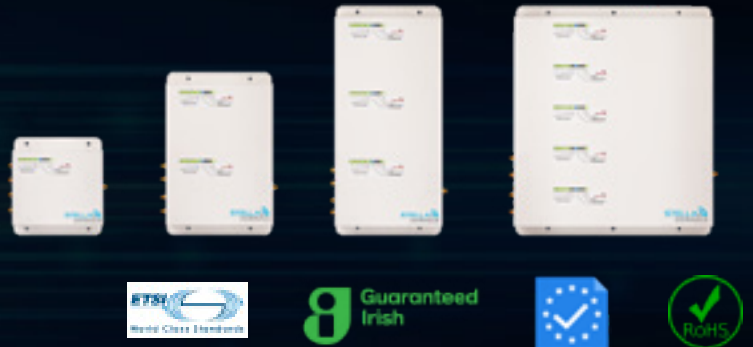

Product code	Frequencies (MHz)	Weight	Dims	PSU	Ports
RP10024-9	900	0.6kg	15X16X3.5cm	12V, 1.5A	4
RP10024-89	800/900	1.0kg	25X17X3.5cm	12V,3A	4
RP10024-8921	800/900/2100	2kg	35X17X3.5cm	12V,3A	4
RP10024-7891821	700/800/900/1800/2100	3.0kg	35X30X4.3cm	12V,5A	4
RP10024-89182126	800/900/1800/2100/2600	3.0kg	35X30X4.3cm	12V,5A	4

Stella repeaters operate silently on the operators network. Using Stella equipment with other manufacturers equipment will break this control system and could potentially harm the operators network. Doing so will void warranty.

Check above for your specific frequencies

Bands	B28	B20	B8	B3	B1	B7
Frequency Downlink	758-788	791-821	925-960	1805-1880	2110-2170	2620-2690
Frequency Uplink	703-733	832-862	880-915	1710-1785	1920-1980	2500-2570

### Amplifier Specification

Coverage	5-15 rooms
Gain	Uplink Gp: 60dB      Downlink Gp> 60dB
Pass band ripple	<4dB
I/O impedance	50 ohm/SMA female connector
Max up/down signal strength	20dBm / 10dBm
Ambient Temperature	-30°C to +70°C
Power supply input	110 - 240V AC
Power supply output	12V DC
Oscillation Control	Automatic
AGC Level Control	Automatic <sup>1</sup>
Uplink Switch On	Yes <sup>2</sup>
AGC Range	30dB
Surge protection	SMA connectors DC grounded, 12V DC port MOV protected

<sup>1</sup>Automatically adjusts during installation. Thereafter, automatically adjusts for seasonal variation in path loss between the base station and the outdoor antenna.

<sup>2</sup>The uplink amplifiers switch off when the repeater is not in use. This reduces the uplink noise to almost zero. When the repeater is in use (phone call or data session), the uplink amplifiers switch on for the duration of the call/ data session only.

Note: Specifications subject to change without notice.

# STELLA DORADUS

WWW.STELLADORADUS.COM



Stella Doradus Europe Ltd,  
Coolfin, Portlaoigh, Co. Waterford,  
X91NH59 Ireland



[info@stelladoradus.com](mailto:info@stelladoradus.com)



+353 51 387145

