


LOG Antenna - UHF LOG antena - UHF

P-2845 N

- ✓ **Covers frequency range 470 - 862 MHz (Ch. 21-69).**
Pokriva frekvenčni pas 470 - 862 MHz (kanali 21-69).
- ✓ **Impedance 75 Ohm, antenna length 114 cm.**
Impedanca 75 Ohm, dolžina antene 114 cm.
- ✓ **Easy to install.**
Enostavna montaža.
- ✓ **Can be used for both horizontal and vertical (optional) polarization.**
Primerna za horizontalno in vertikalno (opcija) polarizacijo.
- ✓ **Reliable and robust design for optimum performance and long life time.**
Zanesljiv in robusten dizajn za optimalno delovanje in dolgo življenjsko dobo.

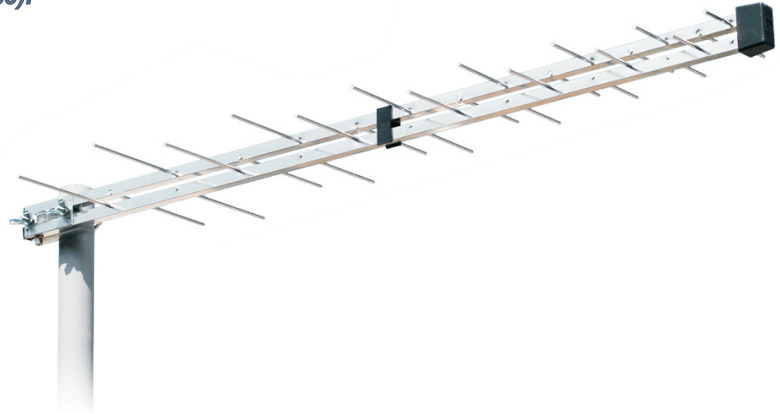

Type Tip	No. of elements Število elementov	Gain Dobitek	F/B ratio Razmerje napr.-naz.	Beam width Širina glav. lista	Connection Priključek	Packing Pakiranje	
						pcs. kos	cm / m3 cm / m3
P-2845 N * P-2845 NF *	28	10 dB(i)	27 dB	H 30-40° V 52-43°	- "F"	10	121x34x27 / 0,111
P-2845 N DTT/G ** P-2845 N G-SWITCH **		25 dB(i)			"F" "F"		




* passive antenna with different connections
pasivna antena z različnimi prikljopi:

- P-2845N** basic version without connector / osnovna izvedba brez konektorja
- P-2845N F** version with "F" connector / izvedba z "F" konektorjem
- P-2845N F H/V** version with "F" connector and H/V mounting / izvedba z "F" konektorjem in H/V pritrditvijo
- P-2845N FZ** version FZ / FZ izvedba
- P-2845N FZ H/V** version FZ and H/V / izvedba FZ in H/V

** active antenna with built-in low-noise antenna amplifier
aktivna antena z vgrajenim nizkošumnim ojačevalnikom:

- P-2845N DTT/G** version with amplifier and "F" connector / izvedba z ojačevalnikom in "F" konektorjem
- P-2845N DTT/G H/V** version with amplifier, "F" conn. and H/V / izvedba z ojačevalnikom, "F" konekt. in H/V
- P-2845N G-SWITCH** version with amplifier with SWITCH system and "F" connector / izvedba z ojačevalnikom s SWITCH sistemom in "F" konektorjem
- P-2845N G-SWITCH H/V** version with amp. with SWITCH system, "F" conn. and H/V / izvedba z ojačeval. s SWITCH sistemom, "F" konekt. in H/V

Amplifier type Tip ojačevalnika	Amplific. Ojačanje	Noise figure Šumno št.	Power supply Napajanje	Power supply source Vir napajanja
built-in antenna vgrajen v anteni	16 dB @ DTT/G 15 dB @ G-SWITCH	2 dB	5 - 24 VDC 25 mA @ DTT/G 83 mA @ G-SWITCH	via coax. cable preko koaks.kabla 75 Ohm

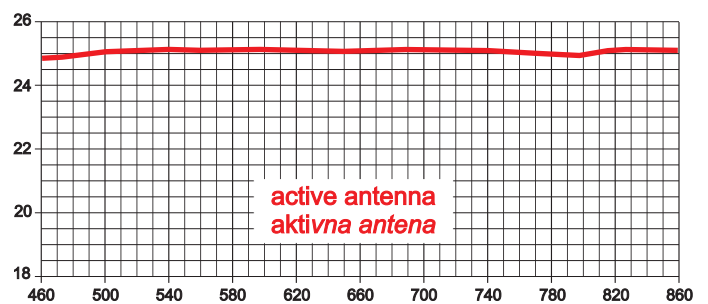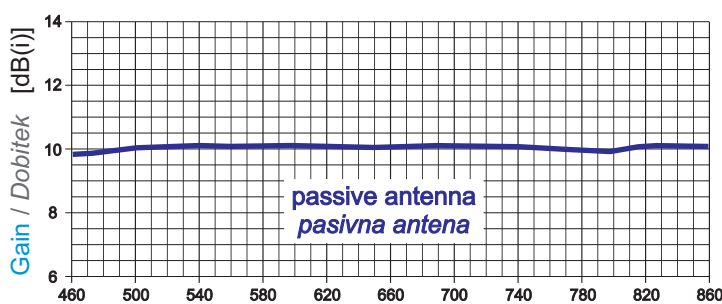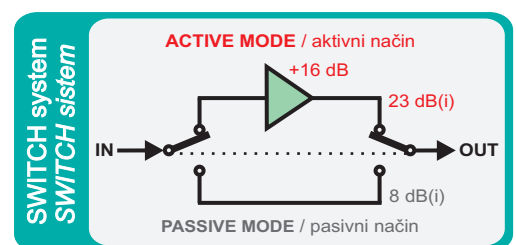

Frequency / Frekvenca [MHz]