

KE Matrix Management Software

CCKM

ATEN's KE Matrix Management Software provides IT administrators with tools to centralize the control and management of KE series devices in their IT environment. It allows easy administration of all KE series devices with a user-friendly, web-based GUI.

The KE Matrix Management Primary-Secondary architecture safeguards data transmissions through built-in redundancy factors, including automated database backup of primary and secondary servers and devices in addition to real-time database updating. Redundancy ensures that if any server hosting the KE Matrix Management Software goes down, the system will remain functioning, since a redundant secondary server maintains all the required services until the primary server comes back up.*

Through ATEN's KE Matrix Management Software, the KE series devices provide advanced features for username and password authentication, user authorization and auto-detection of all devices that can be switched and shared. With secured transmissions in mind, the KE series devices implement AES encryption, while RADIUS, LDAP and AD ensure user account authentication.

IT administrators receive the following benefits implementing the KE Matrix Management Software:

- Advanced features for multi-displays, video grouping, fast switching, profile broadcasting, and media playback scheduling.
- Greater access with quick and easy control tools for configuration of KE devices.
- Secure and reliable access with AES encryption and server redundancy.

Note:

*To set up server redundancy, installation of the CCKM license key on both the primary and secondary servers is required.



Features

Management

- Centralized KE Matrix Management Software, allowing you to configure, administer, control, and maintain all KE series devices via an intuitive web based GUI
- KE Link App — allows customers with licenses to remotely manage KE series devices on the CCKM with an iPad from anywhere **NEW!**
- One-to-one, one-to-many, many-to-one and many-to-many TX/RX connections
- Profiles save and reserve unlimited TX to RX device connections
- Channel connections allow RX devices to connect to multiple TX devices — to stream video, audio, USB and serial sources independently
- Configurable user and group permissions for access and control of KE devices
- Administrators can set access modes on TX devices for collaboration or to avoid interference among users
- Primary-Secondary Infrastructure — Offers centralized management failover with up to 5 secondary servers, for redundancy, and real-time database synchronization **NEW!**
- Administrators can easily view KE status and the latest system events in the GUI dashboard
- Connection Redundancy — automatically connects to another transmitter (Tx) after disconnection with the original Tx, ensuring constant access to servers **NEW!**
- Authentication Lock — Allows automatic logins upon system resume after temporary power down or network disconnection **NEW!**

Flexible and Efficient Operations

- Exceptional Video Wall Scalability — Able to create multiple video wall layouts with up to 64 video displays (8 x 8)
- Advanced Scheduling — improves efficiency and saves costs by allowing media playback to be set based on time and date
- Video grouping of up to 4 sets of KE series devices to support Multi-Display applications
- Fast switching feature for switching transmitter/receiver connections in under a second
- SNMP Agent / SNMP Trap — Automatically sends out SNMP Trap notifications upon specified events, and GET/SET specific configurations from the SNMP manager according to predefined OIDs within the stored MIB file **NEW!**

Easy-to-Use Interface


- Browser-based GUI offers a multi-language interface to minimize user training time and increase productivity
- Multi-browser support: Internet Explorer, Chrome, Firefox, Safari, Opera
- Filter and export function for system event logs
- Email notification of specified system event logs
- Multi-platform installation support: Windows, Linux
- Multi-platform client support: Windows, Mac, Linux, Sun

Advanced Security

- User account authentication and management
- CCKM supports both internal and external authentication — external authentication supports LDAP, Active Directory, RADIUS and TACACS+
- Data transmission is secured by AES encryption

Highlights

<p>Easy to Use interface</p>	<p>The KE Matrix Management Software offers a user-friendly, intuitive, browser-based GUI for simplified access to IT equipment in global data centers and remote offices. The browser-based GUI offers a multilingual interface to minimize user training time and increase productivity.</p>
<p>Centralized Devices and User Permission Management</p>	<p>The KE Matrix Management Software provides centralized management and configuration of remotely distributed KE series devices. It also integrates user accounts with AD, LDAP, TACACS+ and RADIUS servers for improved authentication and authorization.</p>
<p>Primary-Secondary Architecture</p>	<p>The KE Matrix Management Software uses a Primary-Secondary architecture to offer service redundancy with real-time database updating. Once enabled, a Secondary server can automatically substitute for the Primary if the latter fails. Redundancy also means that its function and information are not lost — a redundant Secondary unit can provide the required management services until the offline unit comes back up.</p>
<p>Logging, Audits and Alerts</p>	<p>The KE Matrix Management Software offers flexible logging and reporting options with audit trails for diagnostics and troubleshooting. Powerful search functions and extensive sorting and filtering of log categories that quickly pinpoint the events you are searching for are also provided. Complete logs, as well as log search results, can be exported for audit and analysis.</p>
<p>Multi-Display</p>	<p>The KE Matrix Management Software can video group of up to 4 sets of KE series devices to support up to 8 display monitors for each server.</p>

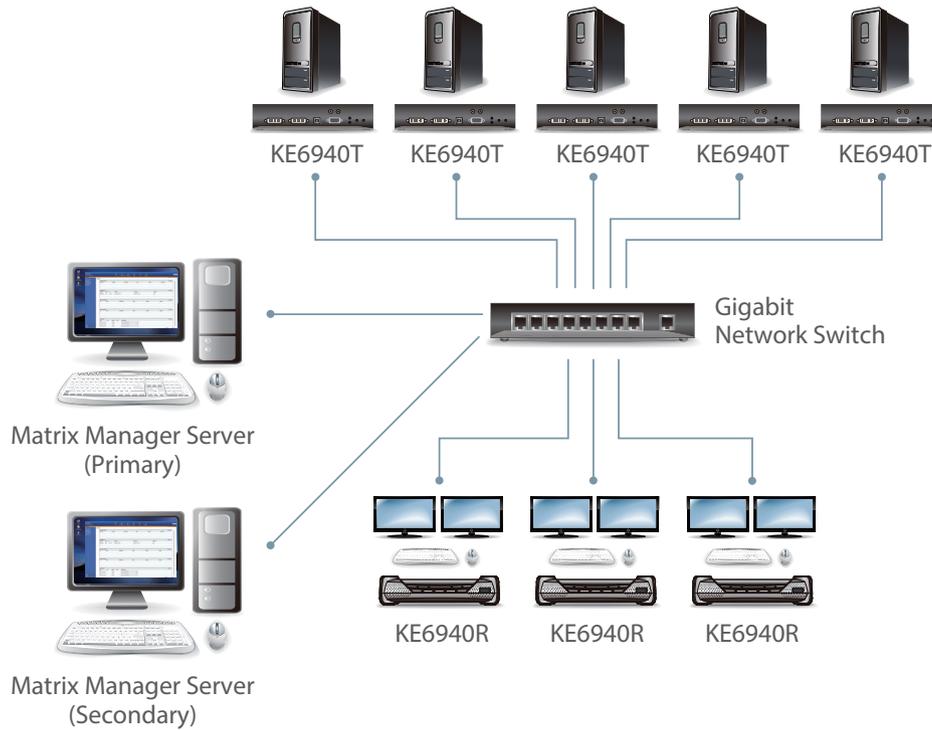

Matrix Manager vs. Matrix Manager Lite Comparison

Function	Matrix Manager	Matrix Manager Lite
Device Licenses	Unlimited	8 (Sum of TX and RX)
User Management	Yes	Yes
Permission Configuration	Yes	Yes
Downloadable Software*	Yes (ATEN Website)	Yes (ATEN Website)
License Key	Yes (USB / Virtual)	No
Redundancy	Yes	Yes
Multi-Display	Yes	Yes

Note: Download from the ATEN eService website.

USB License Key Specifications

Function		CCKM USB License Key
Environment	Operating Temp.	0° to 40° C
	Storage Temp.	-20° to 60° C
	Humidity	0 - 80% RH, Non-condensing
Physical Properties	Housing	Metal & Plastic
	Weight	0.01 kg
	Dimensions (L x W x H)	8.36 x 2.78 x 1.37 cm

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 02/2021 V1.0

© Copyright 2021 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.

