



FIBER TOOLS

LC-500 Launch Cable

TESTING | TROUBLESHOOTING | ACCURACY

Product Features:

ELIMINATE DEAD ZONES:

Long OTDR pulse widths are suppressed


UNIVERSAL, COMPACT DESIGN:

No need for multiple launch cables for varying network connectors

Typically the technician will use a launch cable on the input and output connectors of the fiber under test. This allows the technician to characterize the insertion and return loss of the input and output connectors of fiber link. Supports SC, LC, FC, and ST connectors (APC + UPC as appropriate).

It is recommended that a one meter patch cord is used at the 930XC OTDR bulkhead. Please refer to the application note "Using a one meter Jumper at the bulkhead".

The LC-500 can be stored in the 930XC soft carry bag with the 930XC OTDR. Additional 930XC soft carry bags can be ordered separately if two launch cables are used.

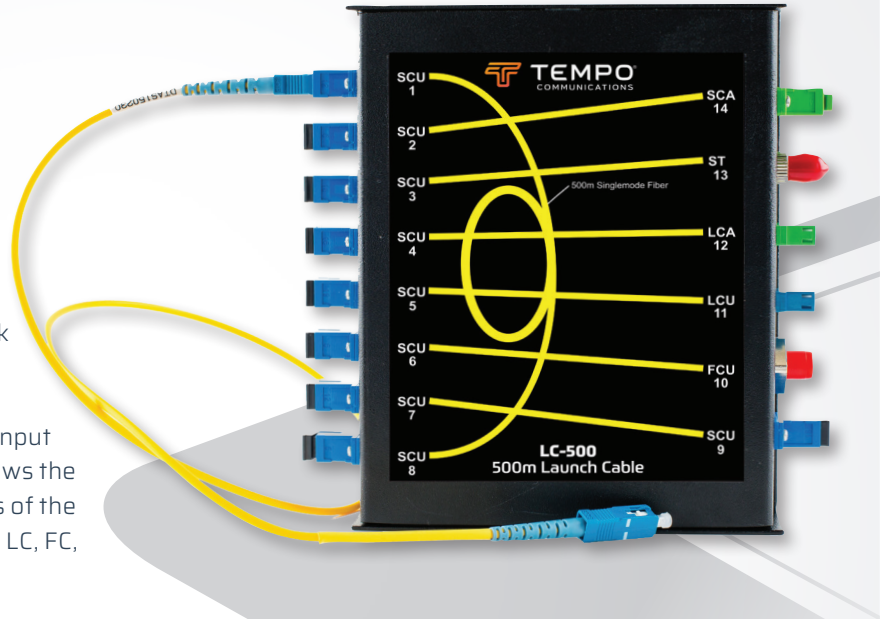

ORDERING INFORMATION:


CAT. NO.	DESCRIPTION
LC-500	500m Launch Cable, Singlemode
20988	Soft Carry Case - Holds up to two LC-500



930XC OTDR

1M PATCH CORD

INPUT
LAUNCH
CABLE



Fiber Under Test

OUTPUT
LAUNCH
CABLE

1390 Aspen Way Vista, CA • 92081

TC6451 12/19

Latin America Phone : 1.760.510.0558 | EMEA Phone: +44 (0) 1633 627710
©2019 Tempo Communications Inc. • An ISO 9001 Company

EMEA Address: Tempo Communications Limited • Brecon House,
William Brown Close, Cwmbran • NP44 3AB, UK

TempoCom.com | tel 800.642.2155



TEMPO
COMMUNICATIONS

Renewed Vision. Innovation Forward.



Follow us on Social Media
@TempoComms