



F E D C B A







8 7 6 5 4 3 2 1



RECOMMENDED MOUNTING HOLE (建議安裝孔)

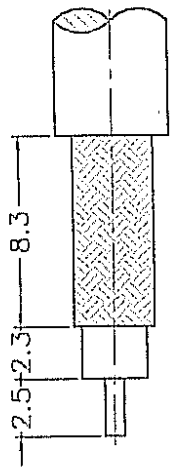

RECOMMENDED CABLE STRIPPING DIM'S (建議剝線尺寸)

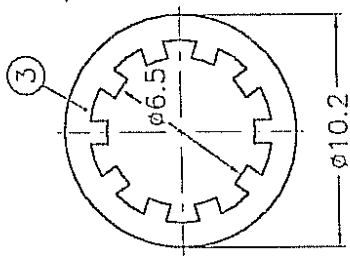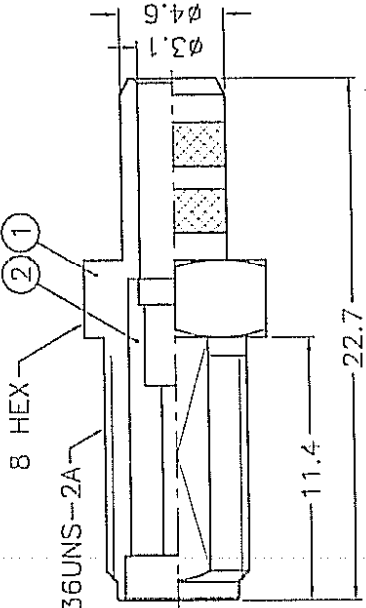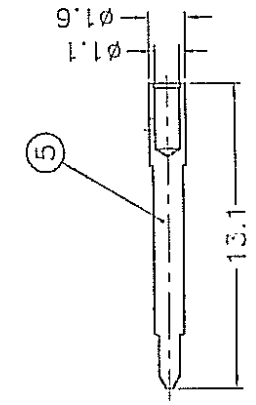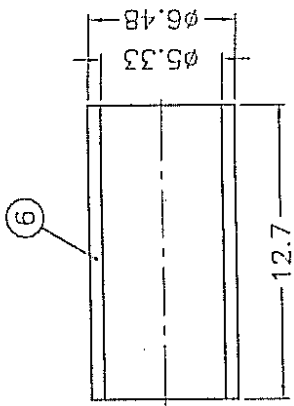

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. BRASS PER QQ-B-613
 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-1946B

6	FERRULE	COPPER	NOTE 3	1	FR-648/533X	127C	FR-648/533X	PART NO.	Amphenol	Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China
5	CONTACT PIN	NOTE 1	NOTE 4	1	RSMAG111A2-3-	16/11	RSMAG111A2-3-	DIMENSIONS ARE IN MILLIMETERS		
4	HEX NUT	NOTE 1	NOTE 5	1	HNS-1/4-36X16		HNS-1/4-36X16	UNLESS OTHERWISE SPECIFIED TOLERANCES	APPROVED	DATE
3	LOCK WASHER	NOTE 2	NOTE 3	1	LW-102/65X05		LW-102/65X05	0.5-6 = ±0.2	<i>Tony</i>	11-15-02'
2	INSULATOR	NOTE 5	NATURAL	1	SMAT000-2T-50		SMAT000-2T-50	6-30 = ±0.4	CHECKED	DATE
1	BODY	NOTE 1	NOTE 3	1	SMAT400-1-46/	31-C	SMAT400-1-46/	30-120 = ±0.6	<i>Dickel</i>	11-15-02'
								120-315 = ±1	DRAWN	DATE
								315-1000 = ±1.6	<i>Dickel</i>	11-15-02'
								1000-2000 = ±2.4		
NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.	SCALE	3/1	ISSUE	A	
1				2						
2				3						
3				4						
4				5						
5				6						
6				7						
7				8						
8										

A