

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® C183 – Special Video/Audio Cable

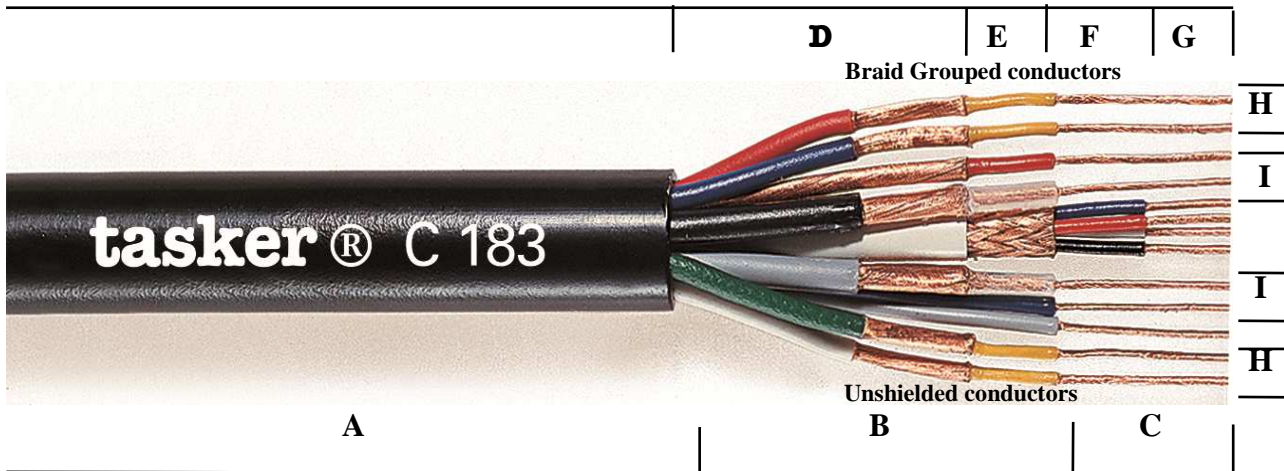

CATEGORY Special Video/Audio Cable (See Video Catalogue)
APPLICATIONS SCART, S-VHS and other Audio/video installations.

A: Black Soft **PVC** Sheath. Outer Diam. Ø 11,00 (±0,20) mm.

2x Unshielded Conductors:

B: Soft **PVC** Sheath. Colored Black and Grey.
 Diam. Ø 1,50 (±0,20) mm.

C: O.F.C. red copper Stranded formation 32x0,10 mm.
 Nom. Cross Section 1x0,25 mm².

Braid Grouped conductors:

D: White Soft **PVC** Sheath. Diam. Ø 4,40 (±0,20) mm.

E: O.F.C. red copper braid shielding covering 90%

F: **PVC** cores insulation, diam. 1,20 (±0,20) mm

G: O.F.C. red copper Stranded formation 32x0,10 mm.
 Nom. Cross Section 4x0,25 mm².

Other spiral shielding Conductors:

H: **PVC** sheath colored red, blue, green, grey. Diam. Ø 2,30 (±0,20) mm.
 O.F.C. red copper spiral shielding covering 100%.
 Cores insulations in yellow PVC, diam. 1,90 (±0,20) mm.
 O.F.C. red copper Stranded formation 32x0,10 mm.
 Nom. Cross Section 4x0,25 mm².

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

- I:** Spiral shielded conductors with shield in O.F.C. red copper spiral shielding covering 100%.
 Cores insulations in red PVC, diam. 1,50 ($\pm 0,20$) mm.
 O.F.C. red copper Stranded formation 32x0,10 mm.
 Nom. Cross Section 1x0,25 mm².

MARKING
CUSTOM
PRODUCTION

C183 - TASKER
 This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

General Properties

Conductors Resistance	75,85 Ω /Km
Capacity Core/Shield for 1,90 dielectric Ins.	130 pF/m
Capacity Core/Shield for yellow dielectric Ins.	360 pF/m
Capacity Core/Shield for braided conductors	240 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			