

MILAN S.r.l. a socio unico


**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## Technical Datasheet



# tasker® C254 – 37x0,14 mm<sup>2</sup> - LiYCY Cable

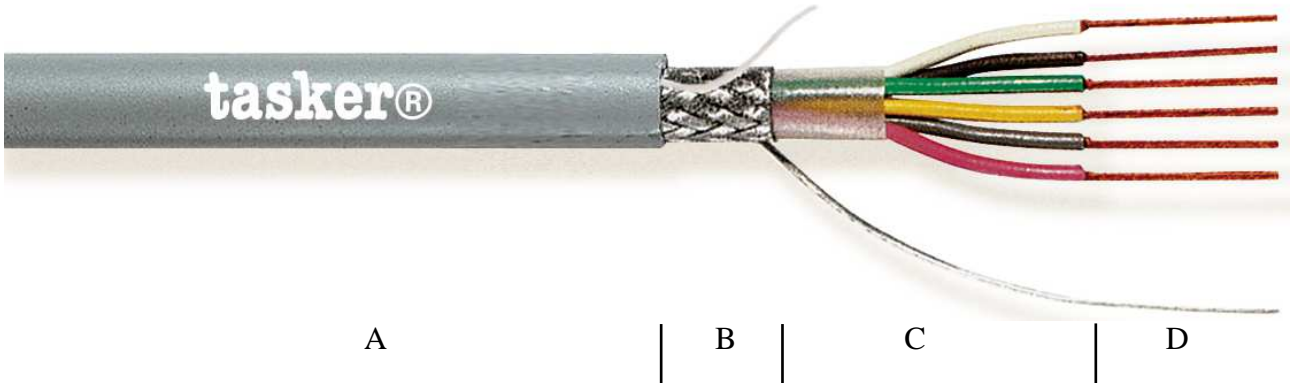

**NOTE** The picture don't represent the real number of conductors  
**CATEGORY** Shielded Cable for Data (See Data Network Catalogue)  
**APPLICATIONS** Data transmissions and electronics

- A:** Grey Soft **PVC** Sheath. Outer cable diam. Ø 10,60 (±0,20) mm.
- B:** Braided Shielding O.F.C. Tinned Copper covering 85% + Drain Wire
- C:** Cores Insulation with Soft **PVC**. Core diam. Ø 1,10 (±0,20) mm.  
 Color Code DIN 47100 Standards: White, Brown, Green, Yellow. Grey, Pink, Blue, Red, Black, Violet, Grey/Pink, Red/Blue, White/Green, Brown/Green, White/Yellow, Yellow Brown, White/Grey, Grey/Brown, White/Pink, Pink/Brown, White/Blue, Brown/Blue, White/Red, Brown/Red, White/Black, Brown/Black, Grey/Green, Yellow/Grey, Pink/Green, Yellow/Pink, Green/Blue, Yellow/Blue, Green/Red, Yellow/red, Green/Black, Yellow/Black and Grey/Blue. Stranded with waste filler between conductors and wrapped with Mylar Tape.
- D:** Stranded O.F.C. Red Copper, formation 18x0,10 mm.  
 Nom. Cross section 37x0,14 mm<sup>2</sup>.

**MARKING** **tasker®** C254 LiYCY 37x0,14 - 26 AWG LOW VOLTAGE Computer Cable  
 Made In Italy

**CUSTOM PRODUCTION** This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

### Cable Properties

<b>Conductor Resistance</b>	138 Ω/Km	<b>Max Rated Voltage</b>	49 V
<b>Capacity Core/Core</b>	70 pF/mt	<b>Operative Temperature</b>	-15/+70°C
<b>Capacity Core/Shield</b>	150 pF/mt		

<b>USE</b>	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<input checked="" type="checkbox"/>	Fixed	Fissa	<b>INFORMATION</b>	<input checked="" type="checkbox"/>	RoHS2 Compliant
<b>Impiego</b>	<input checked="" type="checkbox"/>	Outdoor Limited	Esterno Limitato	<b>Posa</b>	<input checked="" type="checkbox"/>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<input checked="" type="checkbox"/>	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			