
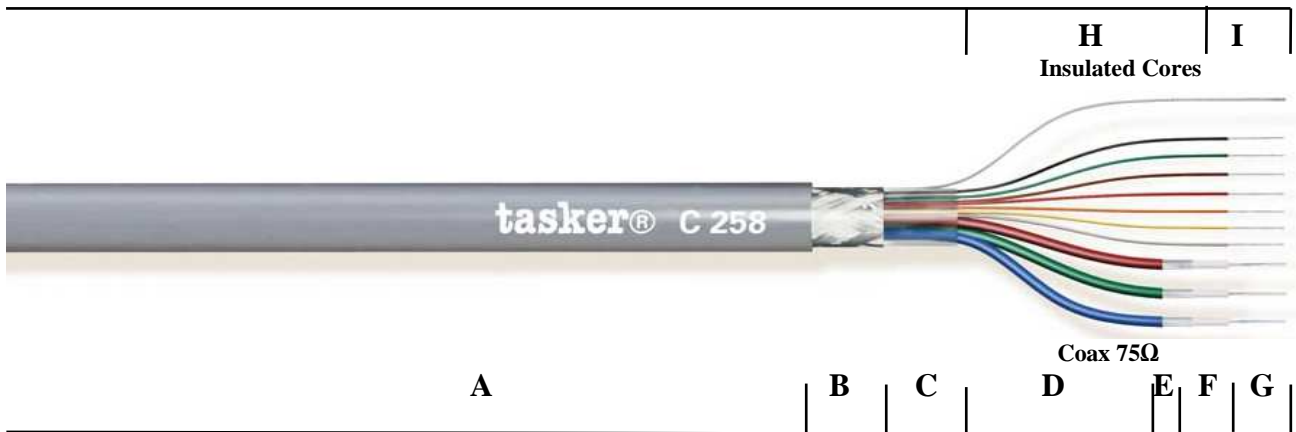


MILAN S.r.l. a socio unico

Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

**FirestoP®** **tasker® C258 Special Video Cable**   
**3x75Ω + 7x0,08 mm<sup>2</sup>**



**CATEGORY** Special Video Cable 75Ω (See Video Catalogue)  
**APPLICATIONS** VGA and XGA

- A:** Grey Soft **Flame Retardant PVC**.  
Outer Diam. Ø 7,60 (±0,20) mm.
- B:** O.F.C. Tinned Copper Braid Shielding, covering 80% + drain Wire.
- C:** Grouping with unweaved polyester tape.

**3x HD Video Coax:**

- D:** Sheath in **PVC HT 105°** - Colored: Red, Green and Blue.  
Diam. Ø 2,40 (±0,20) mm.
- E:** O.F.C. tinned copper spiral shielding, covering 100%.
- F:** Insulated in PPE. Diam. Ø 1,40 (±0,20) mm.
- G:** Stranded in O.F.C. tinned copper formation 7x0,12 mm.  
Nom. section 3x0,08 mm<sup>2</sup> (75Ω).

**7x Insulated Cores:**

- H:** Sheath in **PVC HT 105°** - Colored: White, Brown, Red, Orange, Yellow, Green, Black. Diam. Ø 0,90 (±0,20) mm.
- I:** Stranded in O.F.C. tinned copper formation 7x0,12 mm.  
Nom. section 7x0,08 mm<sup>2</sup>.

**MARKING** **tasker® C258 3x75Ω +7x0,08 – 28 AWG – Monitors VGA – XGA**  
 Cables ITALY

MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

**CUSTOM PRODUCTION**

This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

**General Properties**

<b>Conductors Resistance</b>	203 Ω/Km
<b>Impedence</b>	75 Ω
<b>Velocity of Propagation</b>	66 %
<b>Capacity Core/Shield</b>	67 pF/m
<b>Operative Temperature</b>	-20/+70°C

**Attenuation dB/100 m.**

<b>50 MHz</b>	19,70
<b>100 MHz</b>	28,70
<b>200 MHz</b>	42,00
<b>400 MHz</b>	61,20
<b>800 MHz</b>	88,50
<b>1000 MHz</b>	105,00

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			