


MILAN S.r.l. a socio unico

Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it



**Firestop®** Technical Datasheet **RoHS<sub>3</sub>**  
**tasker® C4025 CPR – 4x0,25 mm<sup>2</sup>**  
**Braided Shielded Cable**

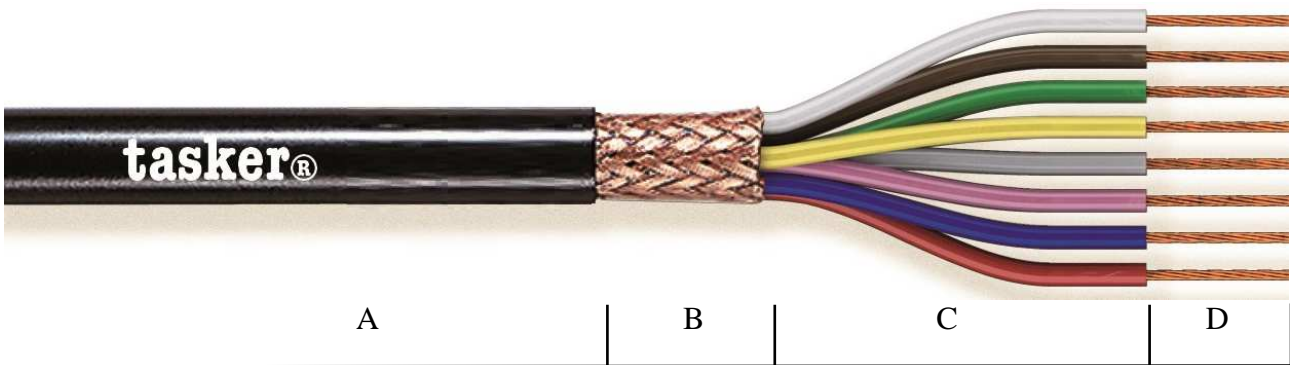

**NOTE**  
**CATEGORY**  
**APPLICATIONS**

The picture does not represent the real number of conductors  
 Braided Conductor Shielded Cable (See Data Network Catalogue)  
 Data transmission and Electronics

- A:** Black **Flame Retardant PVC** sheath.  
Outer cable diam. Ø 5,30 (±0,20) mm.
- B:** Braided Shielding O.F.C. Red Copper covering 85%.
- C:** Cores Insulation with **Flame Retardant PVC**.  
Core color code with DIN 47100 Standards.  
Diam. Ø 1,40 (±0,20) mm.
- D:** Stranded O.F.C. Red Copper formation 8x0,20 mm.  
Nom. Cross section 4x0,25 mm<sup>2</sup>.

**MARKING**

**tasker®** C4025 CPR 4x0,25 mm<sup>2</sup> O.F.C. - IMQ 0051-CPR-0966 – 2017 – Eca –  
 BRAIDED SHIELDED CABLE - Firestop® - Made Italy

**Cable Properties**

<b>Conductor Resistance</b>	75,85 Ω/Km
<b>Capacity Core/Core</b>	150 pF/m
<b>Capacity Core/Shield</b>	260 pF/m
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 26.05.19
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			