


WISI DB 05

Universal antenna sockets, 2-hole loop-through sockets 10 dB

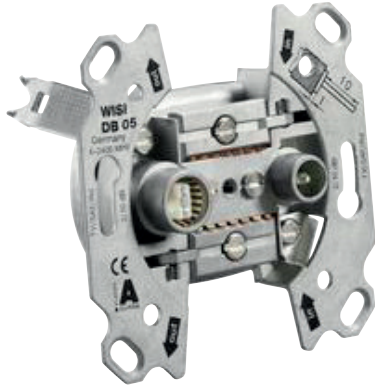

Description

WISI Communications GmbH & Co. KG

Wilhelm-Sihn-Str. 5-7
75223 Niefern-Oeschelbronn, Germany

Phone: +49 7233 66-280, Fax: -350
E-Mail: export@wisi.de

Technical Modifications reserved. WISI cannot be held liable for any printing error. 4. September 2017, 4:00 nachm.

Technical data

Inputs	
Frequency range	5...2400 MHz
Outputs	
Frequency range IEC female	5...2400 MHz
Frequency range IEC male	5...2400 MHz
Insertion loss IEC female	10 dB (± 1 dB)
Insertion loss IEC male	10 dB (± 1 dB)
Through loss	2,5...3,5 dB
Decoupling OUT 1 - OUT 2	≥ 30 dB (5...2400 MHz)
Return loss subscriber	≥ 14 dB
Return loss Input	≥ 14 dB
Return loss output	≥ 14 dB
Connectors	
Outer conductor clamp	2,3...5,4 mm
Inner conductor clamp	0,4...1,15 mm
IEC socket	1 pcs.
IEC-plug	1 pcs.
General data	
Screening factor	Class A, by EN 50083-2 (≥ 85 dB)
Dimensions (width x height x depth)	70 x 70 x 22 mm
Installation depth	35 mm
Impedance	75 Ω

Packaging data

Sales unit	10 pcs.
Dimensions (WxHxD) sales unit	70 x 70 x 22 mm
Packaging volume sales unit	1,08 dm ³
Gross weight sales unit	0,095 kg
Shipping unit	10 pcs.
Dimensions (WxHxD) shipping unit	212 x 148 x 78 mm
Packaging volume shipping package	2.45 dm ³
Gross weight shipping unit	0.115 kg
EAN	4010056199623
Article number	19962
Customs tariff number	85291095