


Series
MPX



NON-ENVIRONMENTAL 20T4 INSERT WITH INTERFACIAL SEAL
FOR 20 SIZE 20 REAR RELEASE, REAR REMOVABLE POWER CONTACTS
AND FOR 4 SIZE 8 REAR RELEASE, REAR REMOVABLE COAX AND TRIAX CONTACTS

Issue:
Oct. 17, 2014

Page
1/1

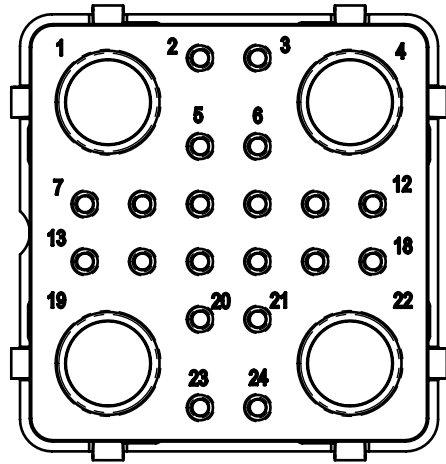

ENGAGING FACE

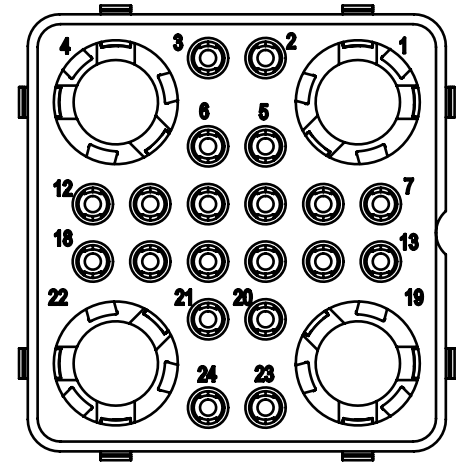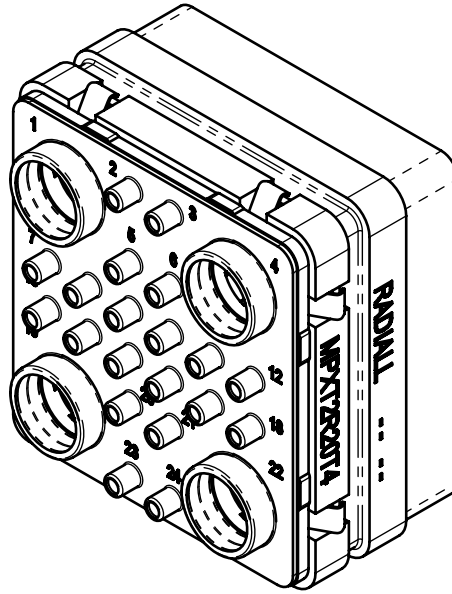

REAR FACE


MATERIALS :

- INSERTS : REINFORCED EPOXY RESIN PER ASTM D 5948 OR HIGH GRADE THERMOPLASTIC PER MIL-P-46183
- CONTACT RETENTION CLIPS : BERYLLIUM COPPER PER ASTM B 194 OR 196
- O-RING AND INTERFACIAL SEALS : FLUOROSILICONE PER SAE AMS-R-25988

NOTES :

SIZE 8 CAVITIES ARE GROUNDED
INSERT SUPPLIED WITHOUT CONTACT

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 13 g

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION PEN: / NOM: BRANJONNEAU V. DATE: Oct. 17, 2014 APPR.: DUPUIS V.				
	/	/	/	/
	Issue	Revisions	Name	Approved

MPXT2R20T4EN

RADIALL PROPRIETARY INFORMATION