

## Description

Outdoor drop coaxial cable - 75 Ohm

Outdoor installation cable (Screening Class A+)

Coaxial Cables

CAVEL®

since 1968

## Data Sheet

RP913ZH



Ø	1,13	4,75	4,90	5,30	6,60
	(Cu)	(PEG)	(Al/Pet)	(CuSn)	(LSZH)

## Class CPR acc. to UE 305/2011 (DoP)

Dca s2,d2,a1

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

## Standards

EN 50117-2-5

## Reaction to Fire

IEC 60332-3-24

IEC 60754-2

IEC 61034

EN50575

## Application

DOCSIS 3.1 (Data Over Coax System)

## Construction data

Inner conductor of plain copper	(Cu)	Ø 1,13 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 4,75 ± 0,10	mm
Outer Aluminium/Polyester tape longitudinally overlapped	(Al/Pet)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		72	%
Diameter over Braid		Ø 5,30	mm
Outer sheath of Thermoplastic material - grey (RAL 7001) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)	Ø 6,60 ± 0,10	mm

Printed each meter by blue ink-jet :

**CAVEL RP913ZH MADE IN ITALY 75 Ohm Euroclass Dca s2,d2,a1 EN50117-2-5 Class A+ CEI-UNEL 36762  
C-4 (U0 = 400V) ULTRA HD / 4K gggaa(n) m**

(ggg=day)(aa=year)(n=batch) (m=meter marking)

## Physical data

Weight of copper conductors	19,07	kg/km
Total weight of cable	45,95	kg/km
Minimum bending radius (single/repeated bending)	35/70	mm
Maximum cable pulling strength	150	N
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

## Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		18	Ohm/km

## ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

## Date

29/02/2016

## Responsible

Alberto Scardovi

Description

Outdoor drop coaxial cable - 75 Ohm

Outdoor installation cable (Screening Class A+)



Data Sheet

RP913ZH

Outer conductor resistance		10,70	Ohm/km
Loop resistance		28,70	Ohm/km
Sheat Insulation voltage (spark test)		3	kV
Maximum current (Ieff)		8	A
Structural return loss (SRL)			
5 - 470 MHz	>30 dB		
470 - 1000 MHz	>28 dB		
1000 - 2000 MHz	>26 dB		
2000 - 3000 MHz	>22 dB		
Screening Attenuation (SA)	SA-Class A++	Shield Transfer Impedance (Zt)	Zt-Class A+
30 - 1000 MHz	>110 dB	5 - 30 MHz	< 2,5 mOhm/m
1000 - 2000 MHz	>105 dB		
2000 - 3000 MHz	>90 dB		


Attenuation (at 20°C )

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,40	862	17,30
10	1,90	1000	18,70
30	3,00	1750	25,70
50	4,00	2150	28,80
200	8,10	2400	30,60
300	9,90	3000	34,10
470	12,60		

Attenuazione di schermatura / Screening Attenuation

Cavo classe A++ / A++ Class cable

Cavo tipo / Cable type: RP913ZH

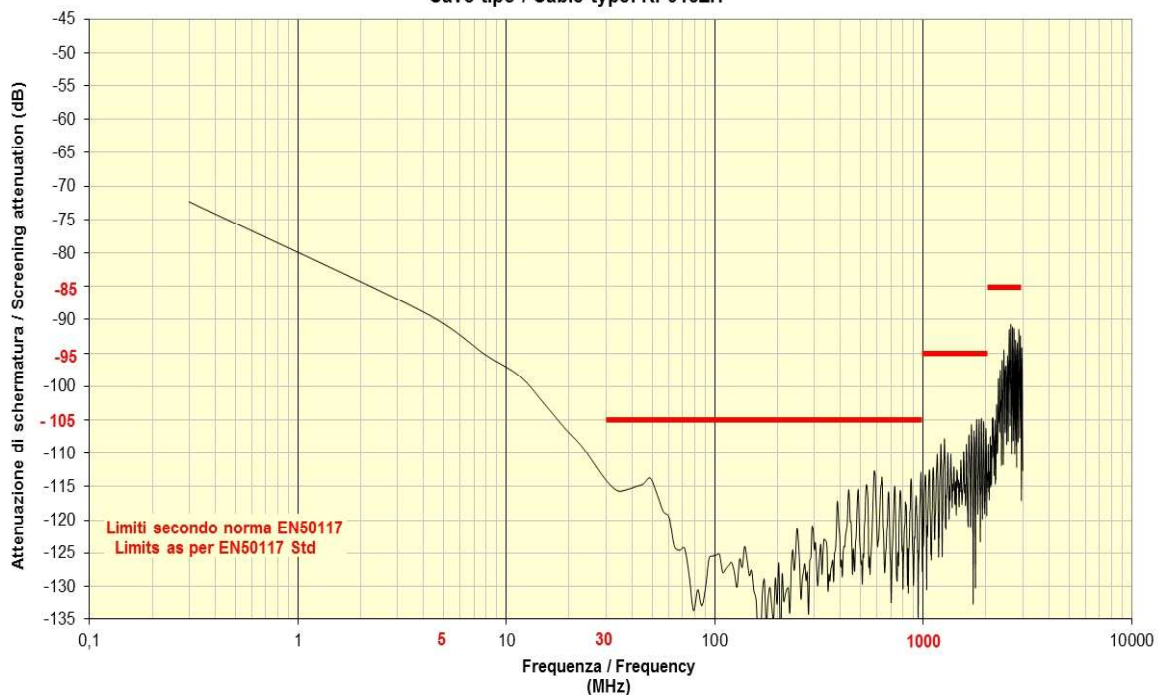

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi