

TSW110

L2 UNMANAGED SWITCH



TSW110 360° VIEW



PLUG-N-PLAY

No additional configuration needed

MOUNTING

DIN rail and surface mounting options

9-30 V

Wide range of supported power supply voltages

DURABILITY

Rugged aluminium housing

STATUS LEDS

1 x Power, 10 x Ethernet

GIGABIT ETH

5 x Gigabit Ethernet with speeds up to 1000 Mbps

TSW110

PRODUCT DESCRIPTION

// TSW110 is a layer 2 unmanaged switch, which is a simplified version of our earlier product – TSW100.

// Possible to power up through the first LAN port.

// It has five 10/100/1000 Mbps Ethernet ports for an economical high-bandwidth solution.

// It offers a wide range of supported power supply voltages (9-30 V).


// Ideal for professional high bandwidth applications to provide reliable data connection.



FRONT VIEW

BACK VIEW

Ethernet ports

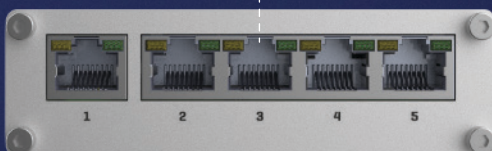

PWR

Power socket

+

Grounding screw

KEY FEATURES

HARDWARE

Ethernet	5 x LAN ports 10/100/1000 Mbps
Power supply	9 - 30 V, 4 pin DC connector
Power consumption	idle: < 0.4 W, max: < 1.8 W
PoE input (passive)	Passive PoE over 4,5 (power) and 7,8 (ground) pins. Possibility to power up through first LAN port, not compatible with IEEE802.3af and 802.3at standards
Connectors	1 x 4 pin DC, 5 x Ethernet
Status LEDs	1 x Power, 10 x Ethernet
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with wall or DIN rail mounting option and grounding capability
Dimensions	100 x 30 x 85 mm
Weight	227 g
Installation	Desktop, wall or DIN Rail mountable (additional kit needed)

PERFORMANCE SPECIFICATIONS

Bandwidth	10 Gbps
Packet buffer	128 KB
Jumbo frame support	9216 bytes
MAC address table size	2K entries
Auto MDI/MDI-X Cable Detection	Yes

SOCIAL

