

## INLINE® PATCH CABLE, CAT.6A, S/FTP, PE OUTDOOR, BLACK




- Cat.6A Patch cable
- S/FTP (PiMf) shielding, pairs in metal foil with braiding
- cable with PE sheet
- Resistant against oils and water, ideal for outdoor usage
- RJ45 plug on both sides, with blue-transparent inlay
- gold plated contacts, minimum 750 plug cycles
- 4x2xAWG27 full copper stranded wire
- Pin assignment 1:1, following to T568B
- POE/POE+ compatible
- for temperature range -10°C ... +60°C
- in a resealable zip bag with EAN barcode

Art. Nr.	Length	EAN
72855S	0.50 m	4043718259649
72801S	1 m	4043718259588
72814S	1.50 m	4043718259632
72802S	2 m	4043718259595
72803S	3 m	4043718259601
72805S	5 m	4043718259618
72807S	7.50 m	4043718259625
72800S	10 m	4043718259571
72815S	15 m	4043718259656
72820S	20 m	4043718259663
72825S	25 m	4043718282791
72830S	30 m	4043718282708
72840S	40 m	4043718282807

### Technical Data


Assignment:	1:1
Brand:	InLine®
Colour:	Black
Conductor material:	CU (copper)
Data transmission rate:	10 Gb/s
Design:	Round cable
Height article:	1.2 cm
Manufacturer No.:	72840S
NVP value:	77%
Outer diameter:	6.5 mm
Packing:	Retail
Patch cable category:	Cat.6A
PoE/PoE+/PoE++:	Yes
Sheath:	PE, halogen free (LSZH)
Shielding:	S/FTP (PiMf)
Side A:	RJ45 plug straight
Side B:	RJ45 plug straight
Signal:	Network
Type:	Cat.6A
Type of packaging:	InLine® bag 20104A
UL:	No
Width article:	1.4 cm
Wire size:	AWG 27
Verpackungsart:	InLine® Tüte 20104A

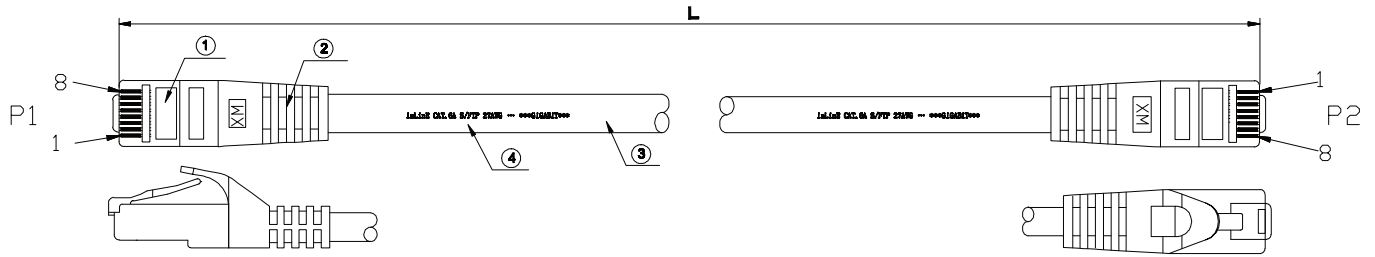

⑤	PACKAGE	InLine PE SELF SEALING BAG	1	PCS
④	PRINTING	InLine CAT. 6A S/FTP 27AWG PE 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2 ***GIGABIT***		
③	CABLE	S/FTP CAT. 6A (27AWG BC*1P+AL-FOIL)*4PAIRS+Braid AL-MG+CABLE JACKET: PVC+PE, OD=6.5±0.2MM	1	PCS
②	MOLD HOOD	PVC, 75A	2	PCS
①	CONNECTOR	RJ45 8P8C PIN GOLD PLATED 3U", THE SHELL PLATED NICKEL, COLOR: TRANSPARENT BLUE	2	PCS
No.	PART NAME	DESCRIPTION	QTY	REMARK

**NOTE:**

1. ELECTRICAL TEST: 100% OPEN SHORT, MISS WIRE TEST
2. TEST LIMIT: Fluke ISO 11801 channel Class Ea PASS
3. Working temperature: -20°C ~ + 70°C
4. Plug Contacts durability: 750 cycles min
5. ROHS2.0 AND REACH COMPLIANT

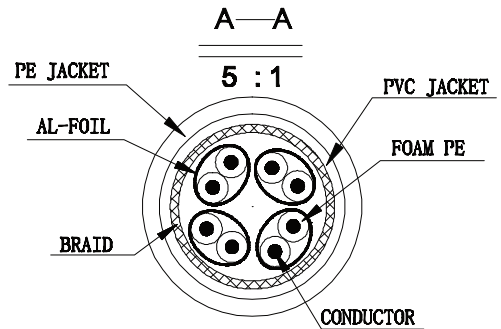

**Angabe der Kabellänge**  
Indicator of cable length



**PIN OUT (568B-568B)**

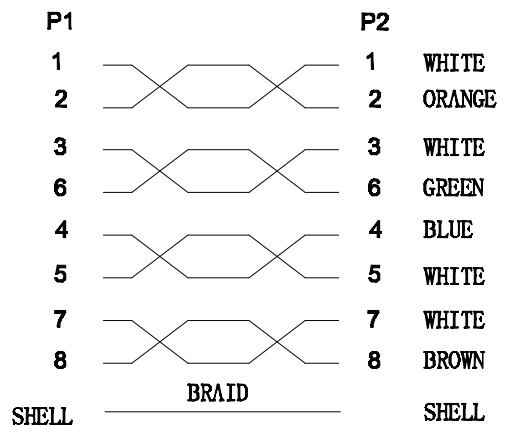


ABBILDUNG ÄHNLICH  
IMAGE SIMILAR