

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet



tasker® C214 – 7x0,25 mm² - LiYCY Cable

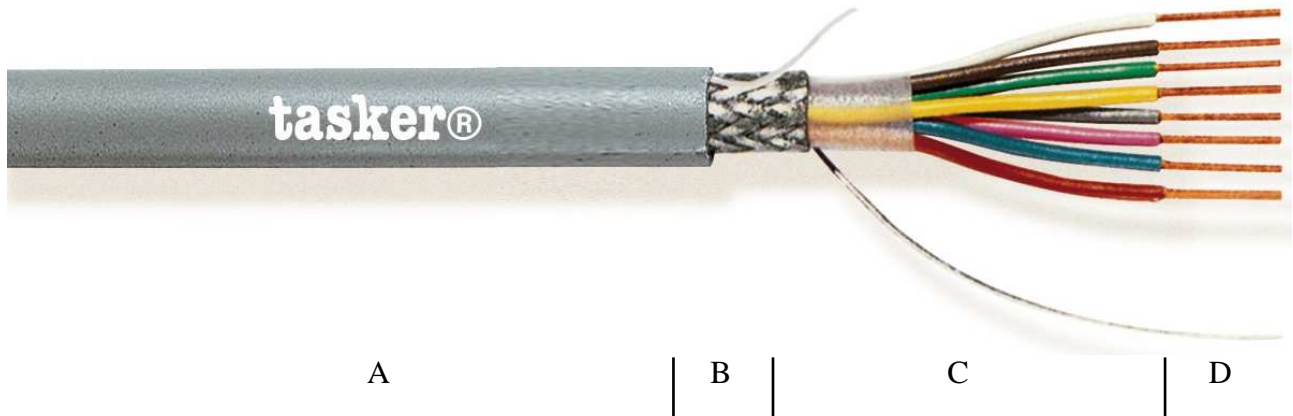

NOTE
CATEGORY
APPLICATIONS

The picture don't represent the real number of conductors.
 Shielded Cable (See Data Network Catalogue)
 Data transmission and electronics.

- A:** Grey Soft **PVC** Sheath.
Outer cable Ø: 6,50 (±0,10) mm.
- B:** Braided Shielding in O.F.C. Tinned Copper, covering 85% + Drain Wire.
- C:** Cores Insulation with Soft **PVC**– DIN 47100 Standards.
Color Code: White, Brown, Green, Yellow, Grey, Pink, Blue.
Diam. Ø 1,30 (±0,10) mm. Stranded with waste filler between conductors and wrapped with Mylar Tape.
- D:** Stranded O.F.C. Red Copper formation 14x0,15 mm.
Nom. Cross section 7x0,25 mm².

MARKING

tasker® C214 LiYCY 7x0,25 – 23 AWG Low Voltage Computer Cable made in Italy

CUSTOM

This product is also available in **L.S.Z.H., PE, PUR**, with or without **Steel Armor**.

Cable Properties

Conductor Resistance	75,85 Ω/Km
Capacity Core/Core	80 pF/mt
Capacity Core/Shield	150 pF/mt
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	INSTALLATION	<input checked="" type="checkbox"/>	Fixed	Fissa	INFORMATION	<input checked="" type="checkbox"/>	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	<input checked="" type="checkbox"/>	Restricted Mobile	Mobile Limitata	Informazioni	<input checked="" type="checkbox"/>	Ver. A / 26.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			