

Features

- ▶ USB 3.2 (Gen 1x1) – 5Gbps data transmission
- ▶ Gold plated precision contacts
- ▶ USB-A male to 4x USB-A female with PureLink APO™, hub function
- ▶ Tinned copper strands and triple shielding, AWG28/24
- ▶ Power transmission with max. power output 3A / 5V / 15W, PSU included

Connections

Connector Material	ABS / PVC Plastic	
Contact Material	Gold-plated	
Connector 1	USB-A Male	
Dimensions Connector 1	42 x 15 x 8mm	
Connector 2	Hub with 4x USB-A Female	
Dimensions Connector 2	81 x 40 x 15mm	
Active Signal Amplifier	PureLink APO™, PSU Included	
Drivers	Plug&Play, no Drivers Required	
Dimensions cable repeater	84.0 x 15.0 mm	
Quantity of in-cable repeater modules per length	Length	Cable repeater quantity
	5.00m	1
	10.00m	1

Cable



Type	Round Cable
Construction	5m: 3x 28AWG Twisted Pairs + 2x 24AWG Single Wires + Drain 10m: 3x 24AWG Twisted Pairs + 2x 20AWG Single Wires + Drain
Shielding	Triple Shielded
Inner Conductor Material	Tinned Stranded Copper
Jacket Outer Material	PVC
Cable Outer Diameter	5m: 5.5mm 10m: 7.0mm
Minimum Bend Radius	5m: 38.5mm 10m: 47.0mm
Sheath Printing	Cable Standards, Max. Temperature, Combustion Class

Signal Transmission

Standard	USB 3.2 (Gen 1x1) / 2.0 / 1.1
Max. Bandwidth	5 Gbps
Max. Power Output	1.25A / 5V / 6.25W

General

Transmission Distance	Up to 10.00m
Operation Temperature	0°C - 50°C
Colour	Black
Packaging	Giftbox, PAP21
Certification / Compliance	CE, FCC, VW-1, ROHS, REACH

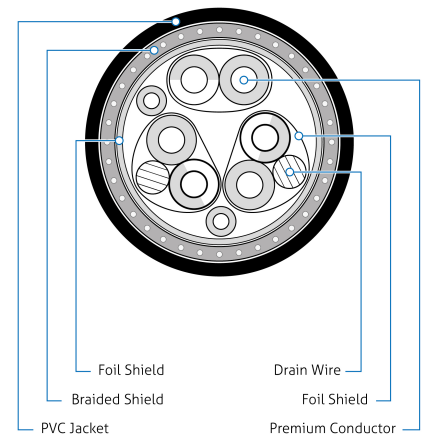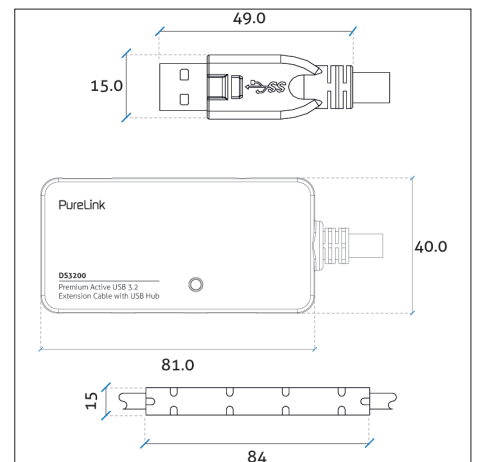

DS3200 Overview

Parent	Art.-No.	Length	Colour	EAN
DS3200	DS3200-050	5.00m	black	4251364716212
	DS3200-100	10.00m	black	4251364716229

PureLink GmbH | Von-Liebig-Str. 10 | 48432 Rheine | Germany | ☎ +49 5971 800 299-0 | 📠 +49 5971 800 299-99 | ✉ info@purelink.de

We regularly expand our product range. We will be happy to provide information on updates in this regard upon request. All information is subject to confirmation and non-binding. Technical changes, printing errors and mistakes excepted. The illustrations used in these document may differ from the delivered product.

