

## Features

- ▶ HDMI version 2.1 - 48Gbps for resolutions up to 8K UltraHD-2 60Hz
- ▶ Gold plated precision contacts with PureLink ULST™ (Ultra-Lock-System™)
- ▶ HDMI-A male to HDMI-A male
- ▶ Halogen-free hybrid cable - Fiber for AV; copper for power and data, Ø 4.5mm
- ▶ AOC technology without external power supply, EMI resistance, low attenuation

### Connections

Connector Material	Plastic
Contact Material	Gold-plated
Connector 1	HDMI-A Male with ULST™
Dimensions Connector 1	36.5 x 20.7 x 11.2 mm
Connector 2	HDMI-A Male with ULST™
Dimensions Connector 2	36.5 x 20.7 x 11.2 mm

### Cable



Type	AOC Fiber / Copper Hybrid Cable
Construction	4x OM3 Fibers, 7x Copper Conductors
Optical Converter	4ch 850nm VCSEL + 4 CH GaAs PD Array
Jacket Outer Material	Halogen-free, CPR Compliant
Cable Outer Diameter	4.5mm
Minimum Bend Radius	45mm Static, 90mm Dynamic
Tensile Strength	Up to 150N

### Signal Transmission

Transmission Modes	AV via Fiber, Power and Data via Copper
Standard	Ultra High Speed HDMI, HDMI v2.1 Compatible
Bandwidth	48 Gbps for 8K / UltraHD-2 @60Hz 4:4:4 10bit
Output Power	5V HDMI

### General

Transmission Distance	Up to 30m, up to 20m ATC Certified
Operation / Storage Temperature	-10~50°C / -20~60°C
Relative Humidity	10~80%
Power Supply	No external Power Supply required (draws power from source device)
Colour	Black
Packaging	Paper Brownbox with Sticker, PAP 20
Certification	CE, FCC, ROHS, REACH, CPR

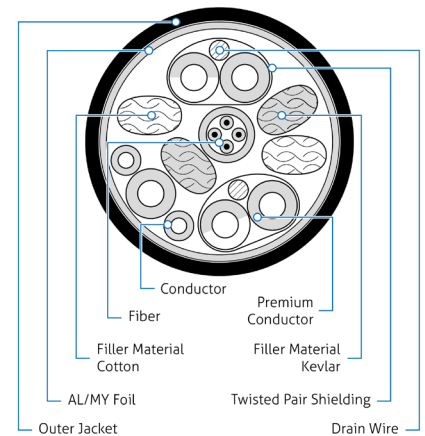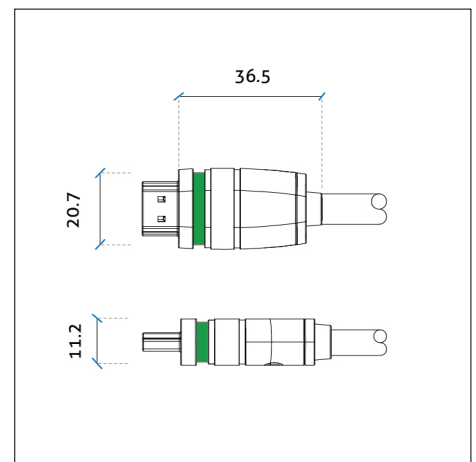

## FX-I375 Overview

Parent	Art.-No.	Length	Colour	EAN
FX-I375	FX-I375-005	5.00m	black	4251364729274
	FX-I375-007	7.50m	black	4251364729281
	FX-I375-010	10.00m	black	4251364729298
	FX-I375-012	12.50m	black	4251364729304
	FX-I375-015	15.00m	black	4251364729311
	FX-I375-020	20.00m	black	4251364729328
	FX-I375-025	25.00m	black	4251364729335
	FX-I375-030	30.00m	black	4251364729342