

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com


Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® C705 U.T.P. Cat. 5e

4x2x0,14 mm² - UL/ETL verified Cable

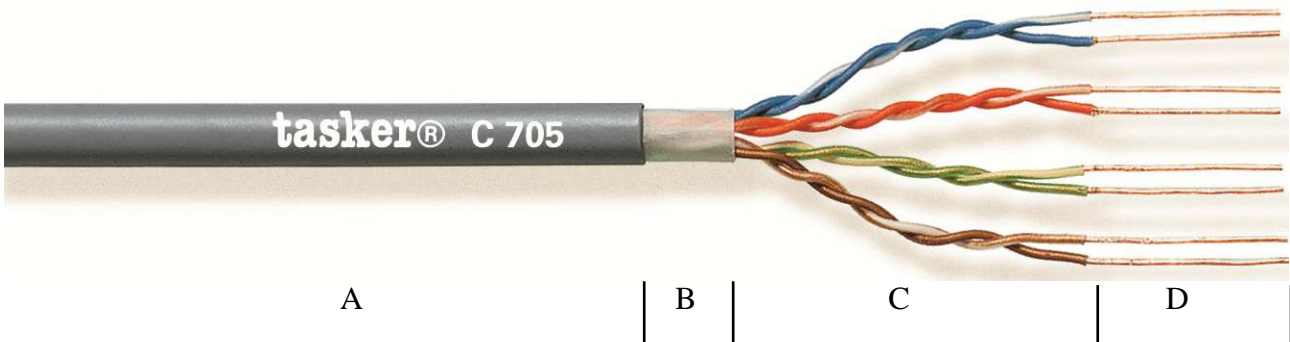

CATEGORY Data Transmission (See Data Network Catalogue)
APPLICATIONS LAN cabling and patch cord

- A:** Grey Soft **PVC** Sheath. Outer cable Diam. Ø 6,00 (±0,20) mm.
- B:** The four pairs are stranded together with polyester based tape.
- C:** Insulation with PE. Diam. Ø 0,90 (±0,20) mm.
 RJ45 plug connector compatible.
 Core colors: White – Blue/Blue White-Orange/ Orange,
 White Green/Green, White-Brown/Brown.
- D:** Stranded formation of 7x0,15 mm in O.F.C. Red Copper.
 Nom. Cross section 4x2x0,14 mm².

MARKING **tasker®** C705 E-TYPE CM 4x2x0,14 mm² 60°C (UL) E188630 CSA LL81295 FT4
 ETL VERIFIED TO TIA/EIA-568-B.2 CAT.5e PATCH CABLE U.T.P.
 13G1707141621

CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	138 Ω/Km
Impedance	100 Ω
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 15.02.18
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			10% measurement tolerance, unless otherwise indicated