


MILAN S.r.l. a socio unico

Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it



## Technical Datasheet **Firestop®** **tasker® C263 Super Special Video Cable 75Ω**

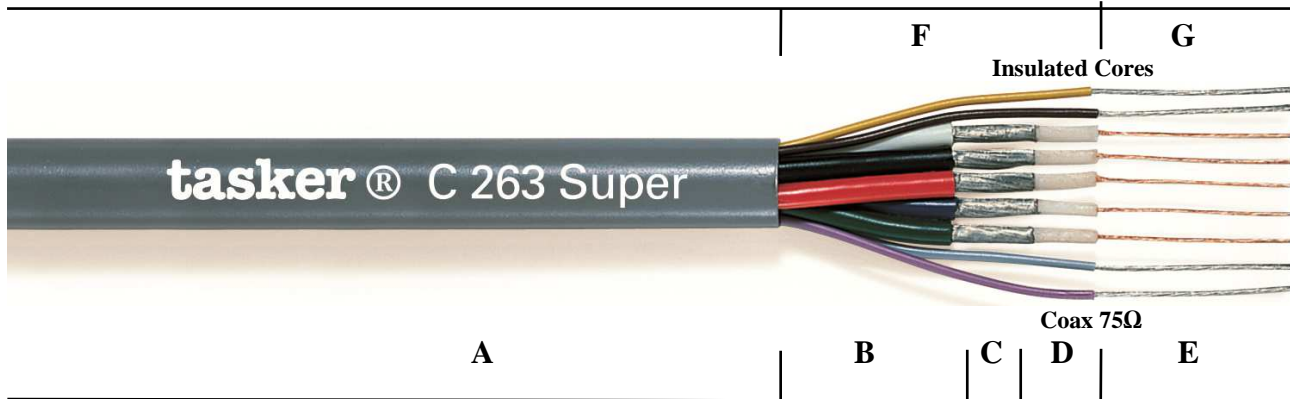

**CATEGORY** Special Video Cable 75Ω (See Video Catalogue)  
**APPLICATIONS** Video RGB + control/switch.

**A:** Grey Soft **Flame Retardant PVC**.  
 Outer Diam. Ø 10,00 (±0,20) mm.

### 5x Coax Video:

**B:** Sheath in **PVC**. Colored: Red, Green, Blue, Black, White.  
 Diam. Ø 2,80 (±0,20) mm.

**C:** O.F.C. tinned copper spiral shielding, covering 100%.

**D:** Insulated in PEE. Diam. Ø 1,60 (±0,20) mm.

**E:** Stranded in O.F.C. tinned copper formation 10x0,10 mm.  
 Nom. section 5x0,08 mm<sup>2</sup> (75Ω).

### 4x Insulated Cores:

**F:** Sheath in **PVC**. Colored: Yellow, Brown, Grey, Violet.  
 Diam. Ø 1,20 (±0,20) mm.

**G:** Stranded in O.F.C. tinned copper formation 7x0,20 mm.  
 Nom. section 4x0,22 mm<sup>2</sup>.

**MARKING** **tasker® C263 SUPER 5x75Ω + 4x0,22 O.F.C. PROFESSIONAL**  
 Multicoaxial Video Cable

MILAN S.r.l. a socio unico

**Head Office – Export department:** **Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa, 74 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158 T. +39 02 9039.0037-0059  
 F. +39 02 9039.4551 F. +39 02 9039.0049  
 www.taskercables.com www.tasker.it

**CUSTOM PRODUCTION**

This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

**General Properties**

<b>Coax Conductors Resistance</b>	203 Ω/Km
<b>Impedence</b>	75 Ω
<b>Velocity of Propagation</b>	66 %
<b>Capacity Core/Shield</b>	67 pF/m
<b>Free Conductors Resistance</b>	79,15 Ω/Km
<b>Operative Temperature</b>	-20/+70°C

**Attenuation dB/100 m.**

<b>50 MHz</b>	19,50
<b>100 MHz</b>	28,50
<b>200 MHz</b>	41,70
<b>400 MHz</b>	60,20
<b>800 MHz</b>	87,30
<b>1000 MHz</b>	103,00

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			